


Technical data sheet

Flat angle, asymmetrical, falling, for device installation
trunking Rapid 80 type GS-A90210
Item number: 6278130



Flat angle, falling, for changing the direction of the GS device installation trunking.

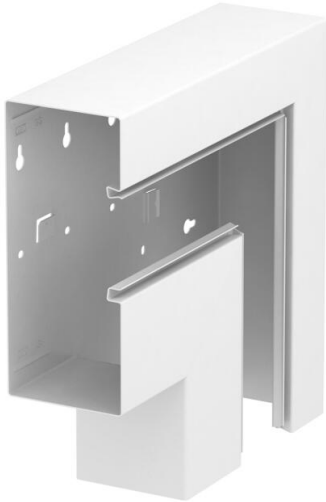

St Steel

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 6278130 |
| Type | GS-AFF90210RW |
| Description 1 | Flat angle |
| Description 2 | falling asymmetrical |
| Manufacturer | OBO |
| Dimension | 90x210x300 |
| Colour | Pure white; RAL 9010 |
| Material | Steel |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 175 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 8,0491 kg CO2e / 1 Piece |


Technical data sheet

Flat angle, asymmetrical, falling, for device installation
trunking Rapid 80 type GS-A90210

Item number: 6278130



Dimensions

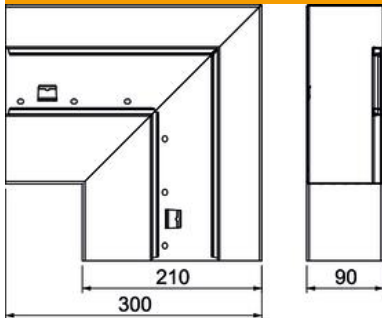

| | |
|--------|--------|
| Length | 300 mm |
| Width | 210 mm |
| Height | 90 mm |

Technical data

| | |
|-----------------------------------|-------------------|
| Number of covers | 1 |
| Version for | Base |
| for duct width | 210 mm |
| for trunking height | 90 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Cover width | 76.5 mm |
| Change of direction | Vertical, falling |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Symmetrical | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |
| Angle range, min. | 90 mm |