

# Technical data sheet

## Support plate 2 x type C for mounting support

Item number: 7407788



Support plate to accept two data connection modules of the following types:  
Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module;  
R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ  
and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ; 3M: CAT6 and CAT6A.  
Dimensions of a mounting opening in mm: 19.30 x 14.80.




A2 Stainless steel

### Master data

Item number	7407788
Type	MTM 2C
Description 1	Support plate
Description 2	with 2x hole pattern Type C
Manufacturer	OBO
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	3.82 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,28 kg CO2e / 1 Piece

### Dimensions

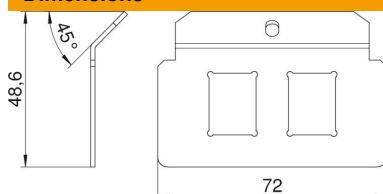

Length	72 mm
--------	-------

# Technical data sheet

## Support plate 2 x type C for mounting support

Item number: 7407788



### Technical data

Connection options	Support plate to accept two data connection modules of following types: Brand-Rex: shielded; EKV: E-Stone; Dätwyler: KS-T, MS-K and KU-T; R&M: Snap-In and Keystone; Rutenbeck: UM, UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ, UMJ, CAT6A
Number of installable devices	2
Number of strain reliefs	0
Version for	Support shape
Fastening type	Lockable
Labelling panel	no
Floor covering protection frame	no
Floor plate	no
Lowerable to be flush-floor	no
Seal installation option	no
Installation opening for on-floor tank	no
Decouplable	no
Suitable for raised floor installation	yes
Suitable for screed-flush closed underfloor ducts	yes
Suitable for screed-covered underfloor ducts	yes
Suitable for cavity floor installation	yes
Suitable for underfloor ducts	yes
With floor covering recess	no
Heavy-duty version	no
Depth	48.6 mm
Strain relief option	yes