


article#	25712-sr
article description	Safety connector lid nat IP54 red series TopTaurus2
description long	Safety connector series TopTaurus2 with hinged lid color: black-red, material: PA6 2-component rubberized screwless quick lock system for housing cover and strain relief earthing system: Austrian/German 16A/ 250V AC / 3p (2P+E), protection rating: IP54
GTIN (EAN)	9003399454790
country of origin	AT
customs number	85366990
net weight	0.132 kg
packaging quantity	10
minimum order quantity	10

ETIM 10.0	EC001327
Model	Coupler with protective contact CEE 7/3 (type F)
Material	Plastic
Material quality	Thermoplastic
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
With quick-lock	True
Colour	Red
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

K (cable Ø)	6-14 mm
SW	21 mm
wire flexible	1-2,5 mm ²
contact screws	80 Ncm
strain relief	400 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C
IK-code *)	IK09



*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

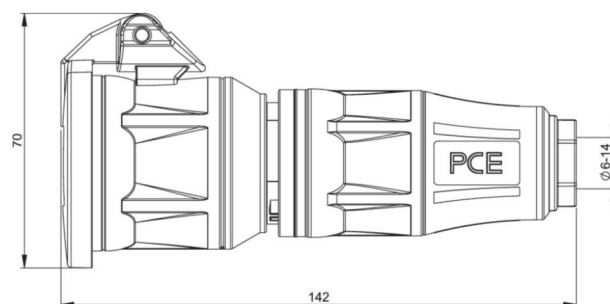

<https://www.pcelectric.at/shop/en/?func=detail&artnr=25712-sr>