


article#	0351-7
article description	CEE-plug 63A 5p 7h IP44 POWER TWIST
description long	CEE-plug 63A 5p 7h IP44 POWER TWIST housing material: PA6 rated current: 63A number of poles: 5 (3P+N+PE) clock-position: 7h rated voltage/frequency: 277/480V~ - 288/500V~ / 50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP44
GTIN (EAN)	9003399655609
country of origin	AT
customs number	85366990
net weight	0.621 kg
packaging quantity	2
minimum order quantity	2

ETIM 10.0	EC000140
IEC-ampereage	63 A
Number of poles	5
Voltage according to EN 60309-2	500 V (50+60 Hz) black
Clock hour position	7 h
Identification colour	Black
RAL-number	7046
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Cable entry	Gland nut
Suitable for cable diameter	14.5 – 36 mm
Angle of plug	Straight
Material	Plastic
Contact material	CuZn
Surface treatment contacts	Nickel-plated

a	250 mm
b	102 mm
c	184 mm
K (cable Ø)	14,5-36 mm
SW	61 mm
wire flexible	6-16 mm ²
contact screws	200 Ncm
connecting screws	200 Ncm
strain relief	1500 Ncm
dismantling length	100 mm
stripping length	15-18 mm
ambient temperature	-25 – 40 °C
temperature resistance	-25 – 80 °C

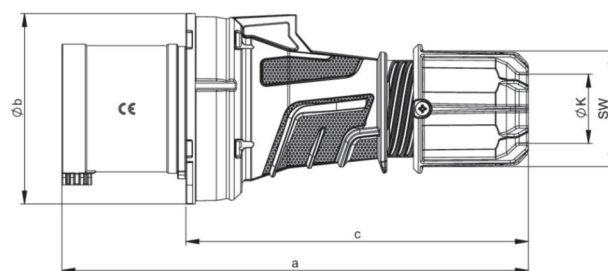

<https://www.pcelectric.at/shop/en/?func=detail&artnr=0351-7>