


|                        |                                                                                                                                                                                                                                                                                   |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>0152-10</b>                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-plug 16A 5p 10h IP67 SHARK</b>                                                                                                                                                                                                                                             |
| description long       | CEE-plug 16A 5p 10h IP67 SHARK<br>housing material: PA6<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 10h<br>rated voltage/frequency: >50V~ / 100-300Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399128899                                                                                                                                                                                                                                                                     |
| country of origin      | AT                                                                                                                                                                                                                                                                                |
| customs number         | 85366990                                                                                                                                                                                                                                                                          |
| net weight             | 0.183 kg                                                                                                                                                                                                                                                                          |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                |

|                                 |                             |
|---------------------------------|-----------------------------|
| ETIM 10.0                       | EC000140                    |
| IEC-amperage                    | 16 A                        |
| Number of poles                 | 5                           |
| Voltage according to EN 60309-2 | 50-500 V (100-300 Hz) green |
| Clock hour position             | 10 h                        |
| Identification colour           | Green                       |
| Degree of protection (IP)       | IP67                        |
| Connection system               | Screwed terminal            |
| Cable entry                     | Gland nut                   |
| Suitable for cable diameter     | 8 – 16 mm                   |
| Angle of plug                   | Straight                    |
| Material                        | Plastic                     |
| Contact material                | CuZn                        |
| Surface treatment contacts      | Untreated                   |

|                        |                       |
|------------------------|-----------------------|
| a                      | 134 mm                |
| b                      | 87 mm                 |
| K (cable Ø)            | 8-16 mm               |
| SW                     | 42 mm                 |
| wire flexible          | 1-2,5 mm <sup>2</sup> |
| contact screws         | 100 Ncm               |
| strain relief          | 500 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 10-12 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |
| IK-code *)             | IK10                  |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

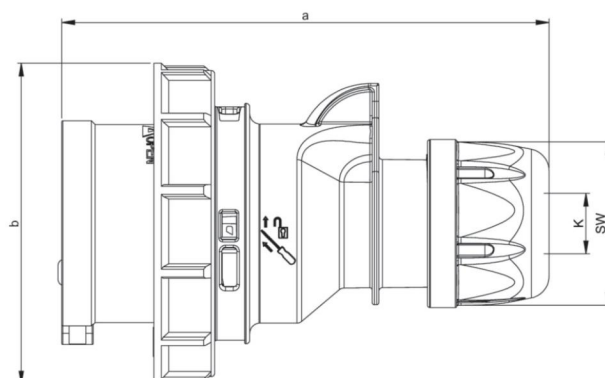

<https://www.pcelectric.at/shop/en/?func=detail&artnr=0152-10>