


|                        |                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>113-4</b>                                                                                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-wall mounted socket 16A 3p 4h IP44</b>                                                                                                                                                                                                                                                                                                   |
| description long       | CEE-wall mounted socket 16A 3p 4h IP44<br>housing material: PA6<br>rated current: 16A<br>number of poles: 3 (2P+PE)<br>clock-position: 4h<br>rated voltage/frequency: 100-130V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>cable entry: top and rear<br>inc. threaded cable grommet<br>IP protection class: IP44 |
| GTIN (EAN)             | 9003399016714                                                                                                                                                                                                                                                                                                                                   |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                              |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                        |
| net weight             | 0.222 kg                                                                                                                                                                                                                                                                                                                                        |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                              |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                              |

|                                 |                         |
|---------------------------------|-------------------------|
| ETIM 9.0                        | EC001321                |
| Model                           | Surface mounted         |
| IEC-amperage                    | 16 A                    |
| Number of poles                 | 3                       |
| Voltage according to EN 60309-2 | 110 V (50+60 Hz) yellow |
| Clock hour position             | 4 h                     |
| Identification colour           | Yellow                  |
| Degree of protection (IP)       | IP44                    |
| Connection system               | Screwed terminal        |
| Cable entry                     | Gland nut               |
| Material                        | Plastic                 |
| Contact material                | CuZn                    |
| Surface treatment contacts      | Untreated               |
| Type of fastening               | Inner lying mounting    |

|                        |                       |
|------------------------|-----------------------|
| a                      | 142 mm                |
| b                      | 97 mm                 |
| wire flexible          | 1-2,5 mm <sup>2</sup> |
| wire solid             | 1-4 mm <sup>2</sup>   |
| contact screws         | 100 Ncm               |
| housing screws         | 110 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 10-12 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |
| IK-code *)             | IK09                  |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

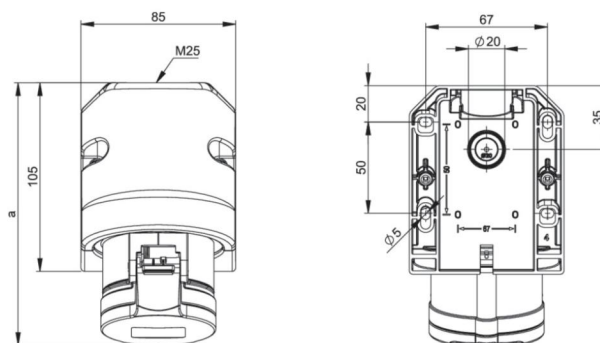

<https://www.pcelectric.at/shop/en/?func=detail&artnr=113-4>