


|                        |                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>4252-9v</b>                                                                                                                                                                                                                                                                                                                                                                           |
| article description    | <b>CEE-flanged socket sloping (92x100mm) 32A 5p 9h IP67</b>                                                                                                                                                                                                                                                                                                                              |
| description long       | CEE-flanged socket sloping (92x100mm) 32A 5p 9h IP67<br>housing material: PA6<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 9h<br>rated voltage/frequency: 120/208V~ - 144/250V~ / 50+60Hz<br>contacts: brass nickel plated<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 92x100 mm / 77x85 mm<br>IP protection class: IP67 |
| GTIN (EAN)             | 9003399187629                                                                                                                                                                                                                                                                                                                                                                            |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                       |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                 |
| net weight             | 0.280 kg                                                                                                                                                                                                                                                                                                                                                                                 |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                                       |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                                       |

|                                 |                       |
|---------------------------------|-----------------------|
| ETIM 9.0                        | EC001317              |
| IEC-amperage                    | 32 A                  |
| Voltage according to EN 60309-2 | 230 V (50+60 Hz) blue |
| Number of poles                 | 5                     |
| Clock hour position             | 9 h                   |
| Identification colour           | Blue                  |
| Degree of protection (IP)       | IP67                  |
| Connection system               | Screwed terminal      |
| Angle of plug                   | Angled                |
| Material                        | Plastic               |
| Contact material                | CuZn                  |
| Surface treatment contacts      | Nickel-plated         |
| Flange size vertical            | 100 mm                |
| Drill hole distance vertical    | 85 mm                 |
| Flange size horizontal          | 92 mm                 |
| Drill hole distance horizontal  | 77 mm                 |

|                        |                        |
|------------------------|------------------------|
| a                      | 92 mm                  |
| b                      | 100 mm                 |
| c                      | 77 mm                  |
| d                      | 85 mm                  |
| e                      | 48 mm                  |
| f                      | 62 mm                  |
| g                      | 70 mm                  |
| h                      | 80 mm                  |
| i                      | 5,5 mm                 |
| j                      | 128 mm                 |
| k                      | 131 mm                 |
| wire flexible          | 2,5-6 mm <sup>2</sup>  |
| wire solid             | 2,5-10 mm <sup>2</sup> |
| contact screws         | 110 Ncm                |
| dismantling length     | 50 mm                  |
| stripping length       | 12-14 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |
| IK-code *)             | IK09                   |

tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

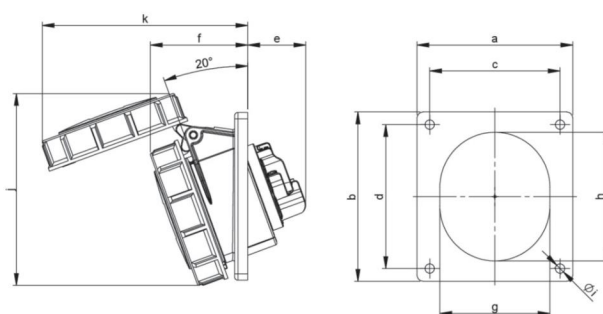

<https://www.pcelectric.at/shop/en/?func=detail&artnr=4252-9v>



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore