


Valena™ Life

Cat. Nos: 7 521 91 - 7 522 91 - 7 523 91

Connected wireless control for roller shutters and orientable sun shades



1. USE

Zone or centralised control for wired roller shutters and orientable sun shades switches.

- Fixes directly on the wall or screws onto a flush-mounting box. Multi-gang versions can be combined with other wiring accessories.
- Fits on a piece of furniture (movable).

Can control up to 20 roller shutter switches.

2. RANGE

Connected wireless control for roller shutters and orientable sun shades (OSS).


Supplied complete with battery.

Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings.

Repositionable self-adhesive fixings supplied.


White	Ivory	Aluminium	Mat Black
7 521 91	7 522 91	7 523 91	7 563 91

3. DIMENSIONS (mm)

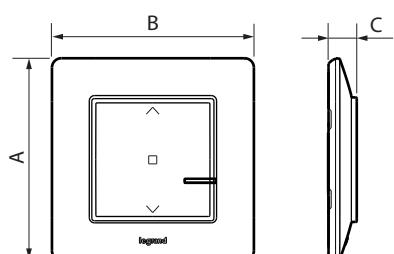

A	B	D
86	86	12

4. OPERATION



Up when pressed at the top:


- short press raises to the top
- long press raises until released.
- OSS mode: long press tilts slats

LED indicator:

- useful during installation
- when pressed, burst flashes red if the battery power is low.

Down when pressed at the bottom:

- short press lowers to the bottom
- long press lowers until released.
- OSS mode: long press tilts slats



RESET button used to return to factory settings

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Protection against impacts: IK 02

Protection against solid bodies/liquids:

- IP 20 without plate and rocker plate
- IP 40 for assembled product

5.2 Material characteristics

Plate: ABS

Sub-plate: PC

Cover plate: ABS

Mechanism with grid: Fibreglass-reinforced (10%) PC

Halogen-free

UV-resistant

Self-extinguishing: 650°C/30 s

5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

Battery life: 8 years for 10 activations a day

ZigBee radio technology

Frequency: 2.4 GHz to 2.4835 GHz

Power level: < 100 mW

5.4 Climate characteristics

Usage temperature: + 5°C to + 45°C

Storage temperature: 0°C to + 45°C

**Connected wireless control for roller shutters
and orientable sun shades****6. CARE**

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately

7. ACCESSORIES

0 648 71: Repositionable adhesive for wireless control (x 4 supplied)

8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (7 521 91 - 7 522 91 - 7 523 91) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com