

Technical data sheet

Trunking, type WDK 80170

Item number: 6026184



Wall installation trunking as trunking base with base perforation and matching trunking cover.
Four cover fixing devices included.
Lid clamp can be moved along the entire length of the trunking.



PVC Polyvinylchloride

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 6026184 |
| Type | WDK80170GR |
| Description 1 | Wall trunking system |
| Description 2 | with base perforation |
| Manufacturer | OBO |
| Dimension | 80x170x2000 |
| Colour | Stone grey; RAL 7030 |
| Material | Polyvinylchloride |
| Smallest sales unit | 8 |
| Unit of quantity | Metre |
| Weight | 214 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 4,4535 kg CO2e / 1 Meter |


Technical data sheet

Trunking, type WDK 80170

Item number: 6026184



Dimensions

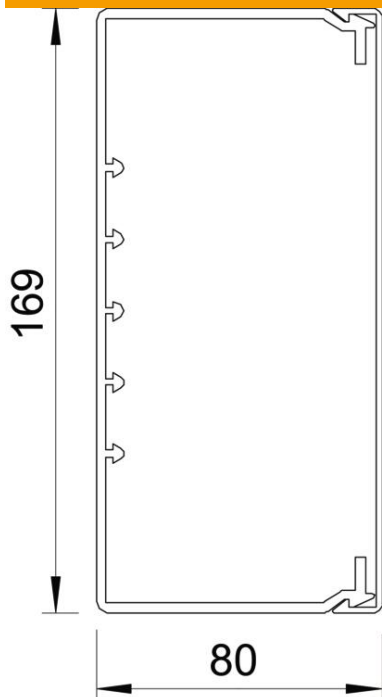

| | |
|--------|----------|
| Length | 2,000 mm |
| Width | 170 mm |
| Height | 80 mm |

Technical data

| | |
|---|-----------------------|
| Number of fixed partitions | 0 |
| Number of cables NYM 3 x 1.5 mm ² Ø 10.5 mm (without socket) | 64 |
| Number of cables NYM 3 x 2.5 mm ² Ø 11.5 mm (without socket) | 53 |
| Number of cables NYM 5 x 1.5 mm ² Ø 12.0 mm (without socket) | 49 |
| Number of insertable partitions | 2 |
| Version, cable trunking cover | Loose |
| Fastening type | Base perforation |
| Maintain electrical functions | no |
| Halogen-free | no |
| Cable retaining clip | yes |
| Duct connector | no |
| Delivery on a roll | no |
| Usable cross-section | 11108 mm ² |
| Protection rating | IP30 |
| Protective film | no |
| Protection rating IK code | IK04 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |